

# Cable-Extension Position Transducer

0...5, 0...10, -5...+5, -10...+10 VDC Output Options

Ranges: 0-2 to 0-50 inches

Compact Size • OEM Applications



# PT1DC

## Specification Summary:

### GENERAL

Full Stroke Range Options ..... 0-2 to 0-50 inches  
 Output Signal Options ..... 0...5, 0...10, -5...+5, -10...+10 VDC  
 Accuracy .....  $\pm 0.28\%$  to  $\pm 0.15\%$  full stroke *see ordering information*  
 Repeatability .....  $\pm 0.05\%$  full stroke  
 Resolution ..... essentially infinite  
 Measuring Cable ..... .019-in. dia. nylon-coated stainless steel  
 Enclosure Material ..... glass-filled polycarbonate and black anodized aluminum  
 Sensor ..... plastic-hybrid precision potentiometer  
 Potentiometer Cycle Life ..... *see ordering information*  
 Maximum Retraction Acceleration ..... *see ordering information*  
 Weight ..... 1 lb. max.

### ELECTRICAL

Input ..... 14.5-40 VDC (10.5-40 VDC for 0...5 and -5...+5 volt output)  
 Input Current ..... 10 mA maximum  
 Output Impedance ..... 1000 ohms  
 Maximum Load ..... 5000 ohms  
 Zero and Span Adjustment ..... *see ordering information*

### ENVIRONMENTAL

Enclosure ..... NEMA 4, IP 65  
 Operating Temperature ..... 0° to 200°F (-17° to 90°C)  
 Vibration ..... up to 10 G's to 2000 Hz maximum

### EMC COMPLIANCE PER DIRECTIVE 89/336/EEC


Emission/Immunity ..... EN50081-2 / EN50082-2



The PT1DC can operate from an unregulated 14.5 to 40 VDC power supply while providing an output signal that is proportional to the linear movement of its measuring cable. The PT1DC has a maximum measurement range up to 50" and has 4 output signal options to choose from: 0...10, 0...5, -10...+10 and -5...+5 Vdc.


Just like the rest of the PT1 series, the PT1DC also offers several options including forward and reverse output signals, zero and span adjustments and alternate measuring cable exits.

## Outline Drawing

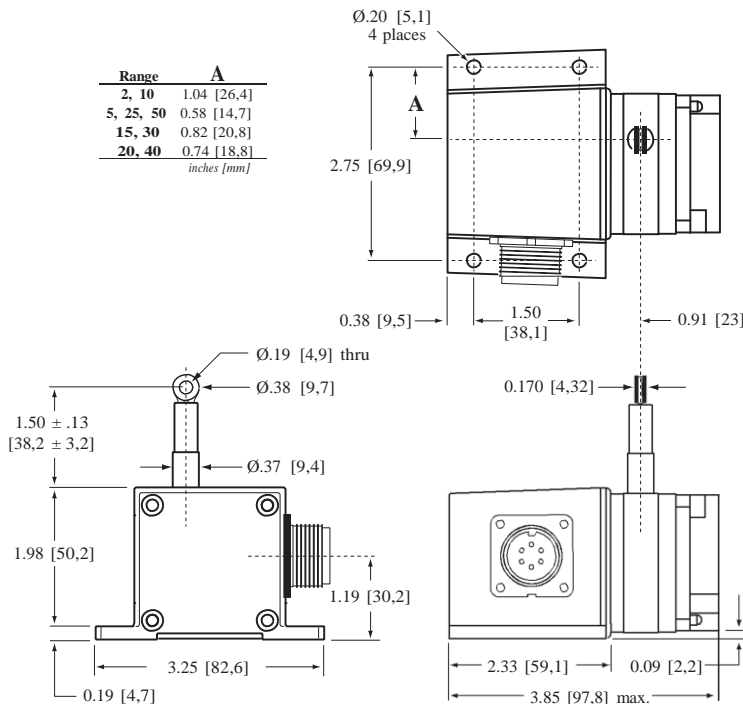

dimensions are in inches [mm], tolerances are 0.03 inches [0.8 mm]

## Output Signal

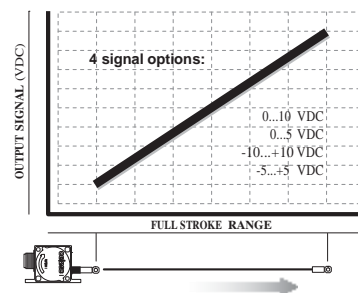

**Ordering Information:**

**Model Number:**

**PT1DC** - **R** - **A** - **B** - **C** - **D**  
*order code:*

Sample Model Number:

**PT1DC - 30 - UP - Z10 - MC4 - S**


- R** range: 30 inches
- A** measuring cable exit: up
- B** output signal: 0...10 VDC
- C** electrical connection: 4-pin micro connector
- D** cable guide: spring-loaded guide

**Full Stroke Range:**

<b>R</b> <i>order code:</i>	<b>2</b>	<b>5</b>	<b>10</b>	<b>15</b>	<b>20</b>	<b>25</b>	<b>30</b>	<b>40</b>	<b>50</b>
full stroke range, min:	2 in.	5 in.	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.
stroke accuracy (% of f.s.):	0.28%			0.18%			0.15%		
accumulator cycle life:	2,500,000 cycles			500,000 cycles			250,000 cycles		
potential									
cable tension (20%):	12 oz.	5 oz.	12 oz.	9 oz.	6 oz.	5 oz.	9 oz.	6 oz.	5 oz.
maximum cable acceleration:	11 G's	3 G's	11 G's	5 G's	4 G's	3 G's	5 G's	4 G's	3 G's

**Cable Exit:**

**A** *order code:* **UP** **DN** **FR** **BK**  
 direction: up down front back

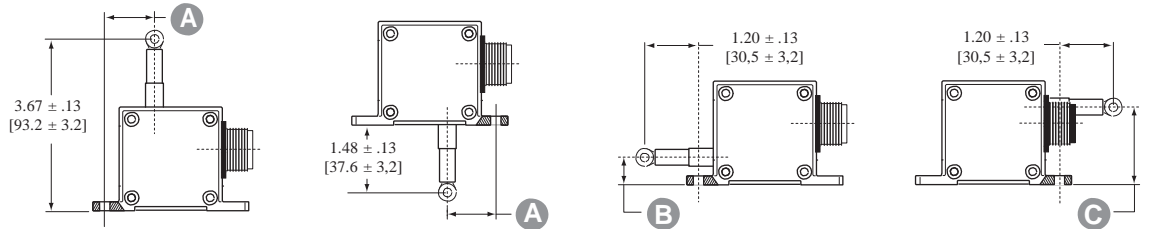


measurement range	<b>2</b>	<b>5</b>	<b>10</b>	<b>15</b>	<b>20</b>	<b>25</b>	<b>30</b>	<b>40</b>	<b>50</b>
<b>A</b>	1.04 in. 26,4 mm	0.58 in. 14,7 mm	1.04 in. 26,4 mm	0.82 in. 20,8 mm	0.74 in. 18,8 mm	0.58 in. 14,7 mm	0.82 in. 20,8 mm	0.74 in. 18,8 mm	0.58 in. 14,7 mm
<b>B</b>	0.75 in. 19,1 mm	0.29 in. 6,1 mm	0.75 in. 19,1 mm	0.53 in. 13,5 mm	0.45 in. 11,5 mm	0.29 in. 6,1 mm	0.53 in. 13,5 mm	0.45 in. 11,5 mm	0.29 in. 6,1 mm
<b>C</b>	1.43 in. 36,3 mm	1.89 in. 48,0 mm	1.43 in. 36,3 mm	1.65 in. 41,9 mm	1.73 in. 43,9 mm	1.89 in. 48,0 mm	1.65 in. 41,9 mm	1.73 in. 43,9 mm	1.89 in. 48,0 mm

**Output Signals:**

<b>B</b> <i>order code:</i>	<b>Z10</b>	<b>10Z</b>	<b>Z5</b>	<b>5Z</b>	<b>M0P0</b>	<b>P0M0</b>	<b>M5P5</b>	<b>P5M5</b>
output signal options:	0...10 VDC	10...0 VDC	0...5 VDC	5...0 VDC	-10...+10 VDC	+10...-10 VDC	-5...+5 VDC	+5...-5 VDC
input voltage:	14.5 - 40 vdc		10.5 - 40 vdc		14.5 - 40 vdc		10.5 - 40 vdc	
span adjustment:	from 100% to 50% of full stroke range				from 100% to 75% of full stroke range			
zero adjustment:	from factory set zero to 50% of full stroke range				from factory set zero to 25% of full stroke range			

example:

ordercode = **Z10** = 0...10 VDC →




**Ordering Information (cont.)**


**Electrical Connection:**

① *order code:*


**MC4**  
4-pin micro-connector  
with 12 ft [3.5 M] cordset

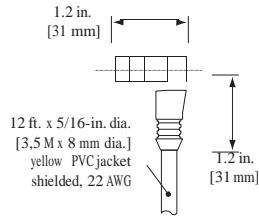

**M6**  
6-pin plastic connector  
with mating plug



**C25**  
25-ft. instrumentation cable  
24 AWG, shielded



**4-pin mating plug and cord set:**



pin	color code	signals
1	RED-BLK TR.	input voltage
2	RED-WHT TR.	output signal
3	RED	common

**6-pin mating plug:**



pin	signals
A	input voltage
B	output signal
C	common


**25-ft. cable:**

color code	standard
RED	input voltage
BLACK	common
GREEN	output signal

**Cable Guide:**


① *order code:*

**blank**  
standard cable guide

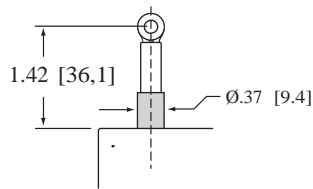



**SG**  
spring-loaded guide

*cable-guide cushions impact from accidental free release*

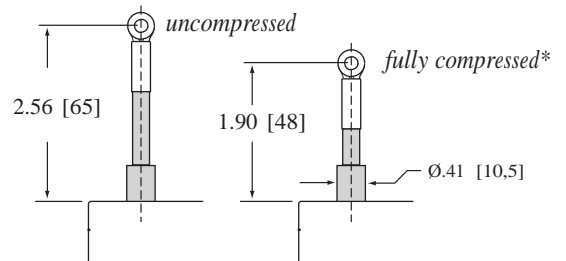

*\*note: start of full stroke range begins at full compression point (except 2-inch and 5-inch ranges).*

**Output Signal Selection (does not apply to -5...+5 & -10...+10 vdc options)**

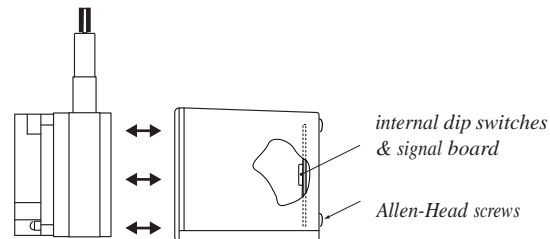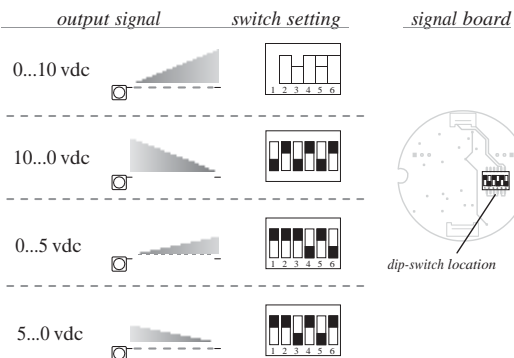

to gain access to the signal board, remove the two Allen-Head Screws and remove rear cover.

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trim pots will be required to precisely match signal values to the beginning and end points of the stroke.