

Cable-Extension Position Transducer

Incremental Encoder Output

Ranges: 0-25, 0-50 in. • 0-625, 0-1250 mm

Compact Size • OEM Applications

PT1E

Specification Summary:

GENERAL

Full Stroke Range Options 0-25 to 0-50 inches
 Output Signal incremental encoder (quadrature)
 Accuracy 0.04% full stroke *contact factory for higher accuracy*
 Repeatability $\pm 0.02\%$ full stroke
 Resolution Options 25 to 1250 pulses per inch
 Measuring Cable Options019-in. dia. nylon-coated stainless steel
 Enclosure Material glass-filled polycarbonate and black anodized aluminum
 Sensor optical encoder
 Maximum Retraction Acceleration *see ordering information*
 Weight 1 lb. max.

ELECTRICAL

Input Voltage *see ordering information*
 Input Current *see ordering information*

ENVIRONMENTAL


Enclosure NEMA 4, IP 65
 Operating Temperature 0° to 160°F (-17° to 71°C)
 Vibration up to 10 G's to 2000 Hz maximum



The heart of the PT1E is an incremental optical encoder which delivers a quadrature formatted digital pulse train. This compact transducer is available with several resolution options for a wide variety of applications from high accuracy position feedback to slow velocity feedback requirements.


The PT1E has many options available including full stroke measurement ranges from 0-2 inches up to 0-50 inches, different output drivers and alternate measuring cable exits.

Outline Drawing

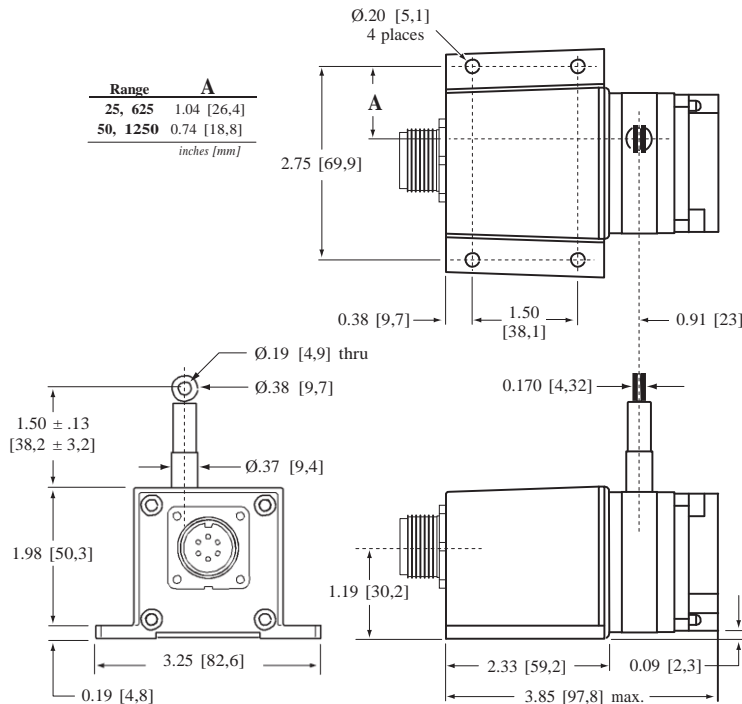

dimensions are in inches [mm], tolerances are ± 0.03 inches [0,8 mm]

Output Signal

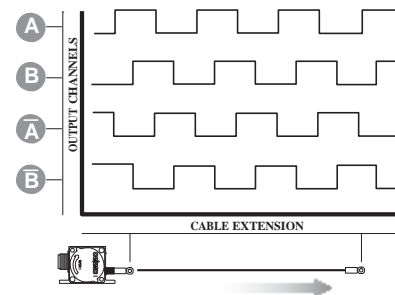

Ordering Information:

Model Number:

PT1E - **R** - **A** - **B** - **C** - **T** - **P**
order code:

Sample Model Number:

PT1E - 25 - UP - 50 - AB-TTL - MC4 - SG

R range:	25 inches
A measuring cable exit:	up
B resolution:	50 pulses per inch
P electrical connection:	4-pin micro connector
T output signal:	TTL/CMOS driver, Channels A,B
P cable guide:	spring-loaded guide

Full Stroke Range:

R order code:	25	50	625	1250
full stroke range, min:	25 in.	50 in.	625 mm	1250 mm
cable tension ($\pm 20\%$):	12 oz.	6 oz.	3,3 N	1,6 N
cable acceleration, max.:	11 G's	4 G's	11 G's	4 G's
resolution options:	50, 500, 1000, 1250 pulses per inch	25, 250, 500, 625 pulses per inch	2, 20, 40, 50 pulses per mm	1, 10, 20, 25 pulses per mm

Cable Exit:

A order code:	UP	DN	FR	BK
direction:	up	down	front	back
measurement range	25	50	625	1250
A	1.04 in. 26,4 mm	0.74 in. 18,8 mm	1.04 in. 26,4 mm	0.74 in. 18,8 mm
B	0.75 in. 19,1 mm	0.45 in. 11,4 mm	0.75 in. 19,1 mm	0.45 in. 11,4 mm
C	1.43 in. 36,3 mm	1.73 in. 43,9 mm	1.43 in. 36,3 mm	1.73 in. 43,9 mm

Resolution:

B order code:	50	500	1000	1250
25-inch full stroke range:	50 ± 1 pulses per inch	500 ± 10 pulses per inch	1000 ± 20 pulses per inch	1250 ± 24 pulses per inch
B order code:	25	250	500	625
50-inch full stroke range:	25 ± 0.5 pulses per inch	250 ± 5 pulses per inch	500 ± 10 pulses per inch	625 ± 12 pulses per inch
B order code:	2	20	40	50
625 mm full stroke range:	2 $\pm 0,04$ pulses per mm	20 $\pm 0,4$ pulses per mm	40 $\pm 0,8$ pulses per mm	50 ± 1 pulses per mm
B order code:	1	10	20	25
1250 mm full stroke range:	1 $\pm 0,02$ pulses per mm	10 $\pm 0,2$ pulses per mm	20 $\pm 0,4$ pulses per mm	25 $\pm 0,5$ pulses per mm

Ordering Information (cont.)

Output Signals:

① order code:	AB-TTL	AB-OC	ABC-LD	ABC-UD
output driver:	TTL - CMOS	Open Collector	5 V - Line Driver	Universal Line Driver
	Input voltage (V+): 4.5...13.2 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 10.8...26.4 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 5 Vdc Sink current: 20 mA max. Input current: 150 mA max.	Input voltage (V+): 5...30 VDC Source/Sink: 20 mA max. Input current: 100 mA max, no load

Electrical Connection:

① order code:	MC4	M6	C25																																																									
	4-pin micro-connector with 12 ft [3.5 M] cordset	6-pin plastic connector with mating plug	25-ft. instrumentation cable 24 AWG, shielded																																																									
	<table border="1"> <thead> <tr> <th>pin</th> <th>color code</th> <th>TTL/CMOS Open Collector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>RED-BLK TR.</td> <td>input voltage</td> </tr> <tr> <td>2</td> <td>RED-WHT TR.</td> <td>channel A</td> </tr> <tr> <td>3</td> <td>RED</td> <td>channel B</td> </tr> <tr> <td>4</td> <td>GREEN</td> <td>common</td> </tr> </tbody> </table>	pin	color code	TTL/CMOS Open Collector	1	RED-BLK TR.	input voltage	2	RED-WHT TR.	channel A	3	RED	channel B	4	GREEN	common	<table border="1"> <thead> <tr> <th>pin</th> <th>TTL/CMOS Open Collector</th> <th>5 V Line Driver Universal Line Driver</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>input voltage</td> <td>input voltage</td> </tr> <tr> <td>B</td> <td>common</td> <td>common</td> </tr> <tr> <td>C</td> <td>channel A</td> <td>channel A</td> </tr> <tr> <td>D</td> <td>channel B</td> <td>channel B</td> </tr> <tr> <td>E</td> <td>-</td> <td>channel A'</td> </tr> <tr> <td>F</td> <td>-</td> <td>channel B'</td> </tr> </tbody> </table>	pin	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver	A	input voltage	input voltage	B	common	common	C	channel A	channel A	D	channel B	channel B	E	-	channel A'	F	-	channel B'	<table border="1"> <thead> <tr> <th>color</th> <th>TTL/CMOS Open Collector</th> <th>5 V Line Driver Universal Line Driver</th> </tr> </thead> <tbody> <tr> <td>red</td> <td>input voltage</td> <td>input voltage</td> </tr> <tr> <td>black</td> <td>common</td> <td>common</td> </tr> <tr> <td>green</td> <td>channel A</td> <td>channel A</td> </tr> <tr> <td>white</td> <td>channel B</td> <td>channel B</td> </tr> <tr> <td>blue</td> <td>-</td> <td>channel A'</td> </tr> <tr> <td>brown</td> <td>-</td> <td>channel B'</td> </tr> </tbody> </table>	color	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver	red	input voltage	input voltage	black	common	common	green	channel A	channel A	white	channel B	channel B	blue	-	channel A'	brown	-	channel B'
pin	color code	TTL/CMOS Open Collector																																																										
1	RED-BLK TR.	input voltage																																																										
2	RED-WHT TR.	channel A																																																										
3	RED	channel B																																																										
4	GREEN	common																																																										
pin	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver																																																										
A	input voltage	input voltage																																																										
B	common	common																																																										
C	channel A	channel A																																																										
D	channel B	channel B																																																										
E	-	channel A'																																																										
F	-	channel B'																																																										
color	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver																																																										
red	input voltage	input voltage																																																										
black	common	common																																																										
green	channel A	channel A																																																										
white	channel B	channel B																																																										
blue	-	channel A'																																																										
brown	-	channel B'																																																										

Cable Guide:

① order code:	blank	SG
	standard cable guide	spring-loaded guide
		<i>cushions impact from accidental free release</i>

*note: start of full stroke range begins at full compression point