

Cable-Extension Position Transducer

- ▼ Short to Medium Range
- ▼ Industrial Grade
- ▼ Precision Potentiometric Output



PT8101



Specification Summary:

GENERAL

Full Stroke Ranges 0-2 to 0-60 inches, see ① next page
 Output Signal voltage divider (potentiometer)
 Accuracy ± 0.25 to 0.10% full stroke, see ②
 Repeatability $\pm 0.02\%$ full stroke
 Resolution essentially infinite
 Measuring Cable stainless steel, nylon-coated or thermoplastic, see ⑤
 Enclosure Material powder-painted aluminum or stainless steel, see ④
 Sensor plastic-hybrid precision potentiometer
 Weight, Aluminum (Stainless Steel) Enclosure 3 lbs. (6 lbs.), max.

ELECTRICAL


Input Resistance 500, 1K, 5K, 10K ohms ($\pm 10\%$) or bridge, see ⑨
 Power Rating, Watts 2.0 at 70°F (derated to 0 @ 250°F)
 Recommended Maximum Input Voltage 30 V(AC or DC)
 Output Signal Change Over Measurement Range 94% $\pm 3\%$ of input voltage

ENVIRONMENTAL


Enclosure Design NEMA 4/4X/6, IP65/67/68, see ⑥ and ⑦
 Operating Temperature -40° to 200°F

The PT8101, using a high cycle plastic-hybrid potentiometer, operates with any basic panel meter or programmable controller in factories and harsh environments requiring linear position measurements in ranges up to 60".

As a member of Celesco's innovative family of NEMA 4 rated cable-extension transducers, the PT8101: installs in minutes by mounting it's body to a fixed surface and attaching it's cable to the movable object, works without perfect parallel alignment, and when it's stainless-steel cable is retracted, it measures only 5".

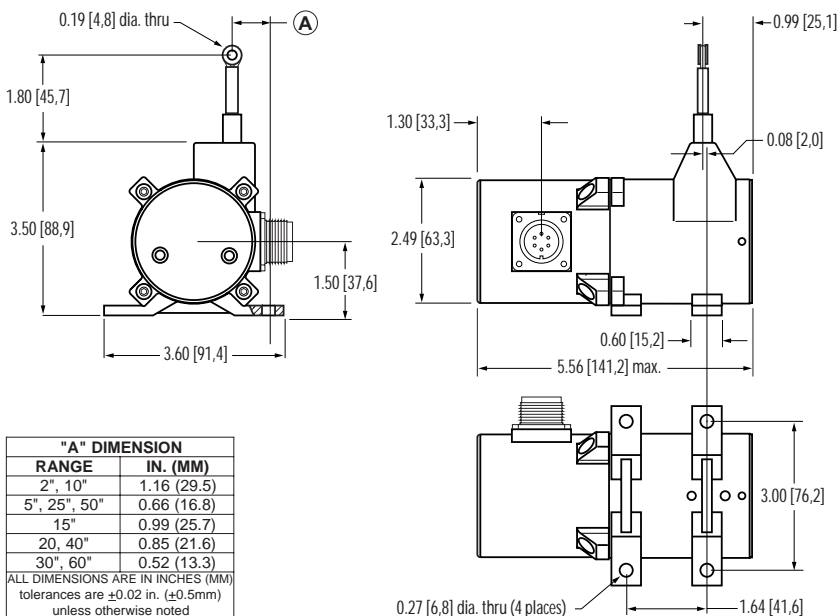

Electrical Output Signal:

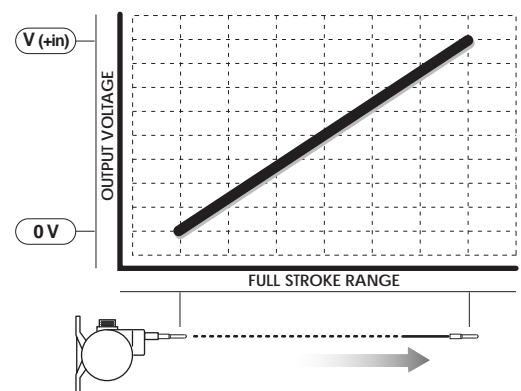

Latin Tech, Inc.

PT8101 • Cable-Extension Transducer • Potentiometric Output

▼ Ordering Information

Model Number:

PT8101- _____ **1** - _____ **1** _____

order code: **R** **A** **B** **C** **D** **E** **F** **G**

Full Stroke Range:

①	②	③	order code:	0002	0005	0010	0015	0020	0025	0030	0040	0050	0060
full stroke range, min:	accuracy (% of f.s.):	maximum cable acceleration:	std. cable tension (±20%):	2 in.	5 in.	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.	60 in.
			potentiometer cycle life*:	0.25%	0.25%	0.15%	0.15%	0.15%	0.15%	0.15%	0.10%	0.10%	0.10%
				25 G's	5 G's	25 G's	10 G's	8 G's	5 G's	3 G's	8 G's	5 G's	3 G's
				28 oz.	12 oz.	28 oz.	19 oz.	15 oz.	12 oz.	9 oz.	15 oz.	12 oz.	9 oz.
				2.5×10^6	2.5×10^6	5×10^5	5×10^5	5×10^5	5×10^5	5×10^5	2.5×10^5	2.5×10^5	2.5×10^5

*note: **potentiometer cycle life** is defined as the minimum number of times the measuring cable can be fully extended and retracted before any measurable degradation of the output signal occurs.

Enclosure Material and Measuring Cable Tension:

④	order code:	1	2	3	4
enclosure material:		powder-painted aluminum		303 stainless steel	
cable tension* multiplier:		1x	3x	1x	3x

*note: refer to ③ above

Measuring Cable:

⑤	order code:	1*	2**	3***
cable construction:		.034 nylon-coated stainless steel	.047 stainless steel	.062 thermoplastic

notes: *available in all ranges

**5, 15, 20, 25, 30-inch ranges only

***available in ranges up to 30-inches only

Output Signals:

⑨	order code:	1	2	3	4	5	6
sensing circuit:		500 ohm	1K ohm	5K ohm	10K ohm	2 mV/V bridge	0...30 mV/V bridge

full scale output: adjustable from 0 to 30mV/V
zero adjust: from full retraction to 50% of full stroke

PT8101 • Cable-Extension Transducer • Potentiometric Output

Electrical Connection:

⑦ order code:

	1	2	3	4																																																										
electrical connection:	6-pin plastic connector and mating plug	10 ft. waterproof cable	6-pin metal connector and mating plug	25 ft. instrumentation cable																																																										
	<table border="1"> <thead> <tr> <th>contact view</th> <th colspan="2">connections</th> </tr> </thead> <tbody> <tr> <td></td> <td>standard</td> <td>bridge</td> </tr> <tr> <td></td> <td>A = +IN</td> <td>A = +IN</td> </tr> <tr> <td></td> <td>B = COMMON</td> <td>B = -IN</td> </tr> <tr> <td></td> <td>C = +OUT</td> <td>C = -OUT</td> </tr> <tr> <td></td> <td></td> <td>D = +OUT</td> </tr> </tbody> </table>	contact view	connections			standard	bridge		A = +IN	A = +IN		B = COMMON	B = -IN		C = +OUT	C = -OUT			D = +OUT	<table border="1"> <thead> <tr> <th>connections</th> <th>connections</th> </tr> </thead> <tbody> <tr> <td>standard</td> <td>bridge</td> </tr> <tr> <td>WHT = +IN</td> <td>not available</td> </tr> <tr> <td>BLK = COMMON</td> <td></td> </tr> <tr> <td>GRN = OUT</td> <td></td> </tr> </tbody> </table>	connections	connections	standard	bridge	WHT = +IN	not available	BLK = COMMON		GRN = OUT		<table border="1"> <thead> <tr> <th>contact view</th> <th colspan="2">connections</th> </tr> </thead> <tbody> <tr> <td></td> <td>standard</td> <td>bridge</td> </tr> <tr> <td></td> <td>A = +IN</td> <td>A = +IN</td> </tr> <tr> <td></td> <td>B = COMMON</td> <td>B = -IN</td> </tr> <tr> <td></td> <td>C = +OUT</td> <td>C = -OUT</td> </tr> <tr> <td></td> <td></td> <td>D = +OUT</td> </tr> </tbody> </table>	contact view	connections			standard	bridge		A = +IN	A = +IN		B = COMMON	B = -IN		C = +OUT	C = -OUT			D = +OUT	<table border="1"> <thead> <tr> <th>connections</th> <th>connections</th> </tr> </thead> <tbody> <tr> <td>standard</td> <td>bridge</td> </tr> <tr> <td>RED = +IN</td> <td>RED = +IN</td> </tr> <tr> <td>BLK = COMMON</td> <td>BLK = -IN</td> </tr> <tr> <td>GRN = OUT</td> <td>WHT = -OUT</td> </tr> <tr> <td></td> <td>GRN = +OUT</td> </tr> </tbody> </table>	connections	connections	standard	bridge	RED = +IN	RED = +IN	BLK = COMMON	BLK = -IN	GRN = OUT	WHT = -OUT		GRN = +OUT
contact view	connections																																																													
	standard	bridge																																																												
	A = +IN	A = +IN																																																												
	B = COMMON	B = -IN																																																												
	C = +OUT	C = -OUT																																																												
		D = +OUT																																																												
connections	connections																																																													
standard	bridge																																																													
WHT = +IN	not available																																																													
BLK = COMMON																																																														
GRN = OUT																																																														
contact view	connections																																																													
	standard	bridge																																																												
	A = +IN	A = +IN																																																												
	B = COMMON	B = -IN																																																												
	C = +OUT	C = -OUT																																																												
		D = +OUT																																																												
connections	connections																																																													
standard	bridge																																																													
RED = +IN	RED = +IN																																																													
BLK = COMMON	BLK = -IN																																																													
GRN = OUT	WHT = -OUT																																																													
	GRN = +OUT																																																													
IP rating:	67	67, 68*	65	67																																																										
NEMA rating:	6, 4X**	6, 4X**	4	6																																																										

note: *requires factory submersion test

**applies to stainless steel enclosure, see ④

Cable Guide Options:

⑧ order code:

	0	1	2*	3
	standard nylon cable guide	stainless steel cable guide	polyurethane cable bellows	integral cable brush

note: *will limit measurement range to 25 inches (635 mm) maximum

▼ Sample Model Number

PT8101-0030 - 1 2 1 - 4 1 1 0

order code: ⑧ ① ② ③ ④ ⑤ ⑥ ⑦

Specifications: Full Stroke Range: 30 inches
 Enclosure Material: powder-painted aluminum
 Measuring Cable: 0.047-in dia. stainless steel cable
 Output Signals: 10 K ohm potentiometer sensor
 Electrical Connection: 6-pin plastic connector
 Cable Guide: standard nylon