

# Cable-Extension Position Transducer

- ▼ Long Range
- ▼ Industrial Grade
- ▼ Positon and Velocity Transducer

## Specifications:

Full Stroke Ranges-on this datasheet. 0-600 to 0-1700 inches, see ① back page

### POSITION

Output Signal .....	voltage divider (potentiometer)
Accuracy .....	$\pm 0.10\%$ full stroke
Repeatability .....	$\pm 0.02\%$ full stroke
Resolution .....	essentially infinite
Sensor .....	plastic-hybrid precision potentiometer
Potentiometer Cycle Life .....	250,000, min.
Input Resistance .....	500, 1K, 5K, and 10K ohms $\pm 10\%$ , see ⑥
Power Rating, Watts .....	2.0 at 70°F (derated to 0 @ 250°F)
Recommended Maximum Input Voltage .....	30 V(AC or DC)
Output Signal Change Over Measurement Range .....	94% $\pm 4\%$ of input voltage

### VELOCITY


Output Signal .....	DC tachometer output
Linearity .....	better than $\pm 0.10\%$ of output at any velocity
Repeatability .....	$\pm 0.10\%$ of reading
Maximum velocity .....	see ④
Sensor .....	tach generator
Input Voltage .....	none
Output Voltage @ 100 IPM .....	361 mV $\pm 3\%$
Output Impedance .....	350 ohm $\pm 10\%$
Output Ripple ..	$\pm 3\%$ rms of velocity output (for velocities > 1.29 inches per second)

### GENERAL

Measuring Cable .....	nylon-coated stainless steel or thermoplastic, see ②
Enclosure Material .....	powder-painted aluminum or stainless steel, see ③
Maximum Retraction Acceleration .....	see ⑤
Weight, Aluminum (Stainless Steel) Enclosure .....	14 lbs. (28 lbs.), max.

### ENVIRONMENTAL

Enclosure Design .....	NEMA 4/4X/6, IP 65/67/68, see ②
Operating Temperature .....	-40° to 200°F
Vibration .....	up to 10 G's to 2000 Hz maximum

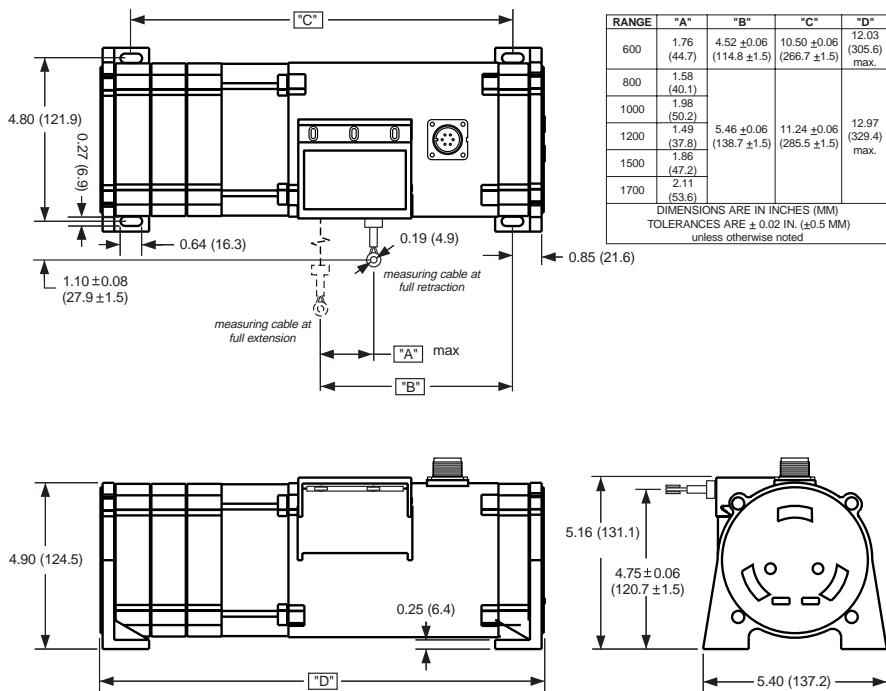


EXTENDED RANGE  
**PT9301**



The PT9301 is a combination position and velocity transducer for demanding long-range applications requiring a linear position measurements in ranges up to 1700". A precision plastic-hybrid potentiometer provides accurate position feedback while a self-generating DC tachometer provides a velocity signal that is proportional to the speed of the traveling stainless-steel measuring cable.

As a member of Celesco's innovative family of NEMA 4 rated cable-extension transducers, the PT9301 offers numerous benefits. It installs in minutes, works without perfect parallel alignment, and when it's stainless-steel cable is retracted, it measures only 6".

## Velocity Output Signal:

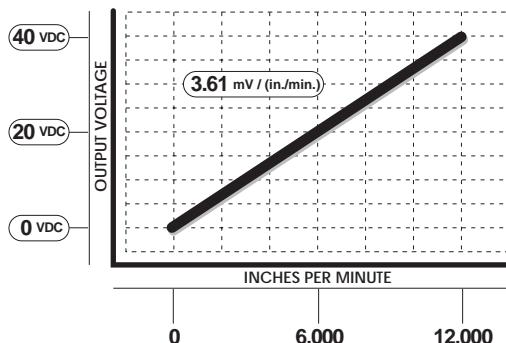

Latin Tech, Inc.

# PT9301 • Extended Range • Cable-Extension Transducer • Position and Velocity Transducer

## ▼ Ordering Information

### Model Number:

**PT9301-** \_\_\_\_\_ **R** - **A** **1** **B** - **C** **1** **D** **E** - **F** **0** **G**

### Full Stroke Range:

	<b>R</b> order code: ① full stroke range, min:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
①	full stroke range, min:	600 inches	800 inches	1000 inches	1200 inches	1500 inches	1700 inches
	cable tension ( $\pm 30\%$ ):	25 oz.	25 oz.	24 oz.	24 oz.	23 oz.	23 oz.

② cable construction: .034 nylon-coated stainless .024 nylon-coated stainless .019 nylon-coated stainless .015 stainless steel

### Enclosure Material:

	<b>A</b> order code: ③ enclosure material:	<b>1</b>	<b>3</b>
③	enclosure material:	powder-painted aluminum	303 stainless steel
④	maximum velocity:	60 inches per second	20 inches per second
⑤	max. retraction acceleration:	1 G	0.33 G

### Cable Exit:



	<b>C</b> order code: direction: 1 front	2 top	3 rear	4 bottom

### Output Signals:

	<b>D</b> order code: ⑥ position & velocity circuits:	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>

**Electrical Connection:**

① order code:

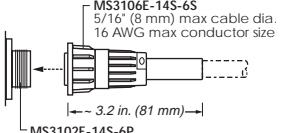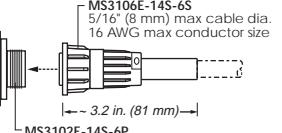	1	3	4																								
electrical connection:	6-pin plastic connector and mating plug	6-pin metal connector and mating plug	25 ft. instrumentation cable																								
	  <table border="1" style="margin-left: 20px;"> <thead> <tr> <th colspan="2">connections</th> </tr> <tr> <th>position</th> <th>velocity</th> </tr> </thead> <tbody> <tr> <td>A = +IN</td> <td>E = +OUT</td> </tr> <tr> <td>B = COMMON</td> <td>F = -OUT</td> </tr> <tr> <td>C = +OUT</td> <td></td> </tr> <tr> <td>D = n/c</td> <td></td> </tr> </tbody> </table>	connections		position	velocity	A = +IN	E = +OUT	B = COMMON	F = -OUT	C = +OUT		D = n/c		  <table border="1" style="margin-left: 20px;"> <thead> <tr> <th colspan="2">connections</th> </tr> <tr> <th>position</th> <th>velocity</th> </tr> </thead> <tbody> <tr> <td>A = +IN</td> <td>E = +OUT</td> </tr> <tr> <td>B = COMMON</td> <td>F = -OUT</td> </tr> <tr> <td>C = +OUT</td> <td></td> </tr> <tr> <td>D = n/c</td> <td></td> </tr> </tbody> </table>	connections		position	velocity	A = +IN	E = +OUT	B = COMMON	F = -OUT	C = +OUT		D = n/c		
connections																											
position	velocity																										
A = +IN	E = +OUT																										
B = COMMON	F = -OUT																										
C = +OUT																											
D = n/c																											
connections																											
position	velocity																										
A = +IN	E = +OUT																										
B = COMMON	F = -OUT																										
C = +OUT																											
D = n/c																											
⑦	IP rating: 67	65	67																								
⑧	NEMA rating: 6, 4X*	4	6																								

note: \*applies to stainless steel enclosure, see ③

**▼ Sample Model Number**

**PT9301-1500 - 1 1 1 - 1 1 1 0**

order code:

- Specifications: Full Stroke Range: 1500 inches  
 Enclosure Material: powder-painted aluminum  
 Measuring Cable: 0.015-in dia. stainless steel cable  
 Cable Exit: front  
 Output Signals: DC tachometer generated velocity signal and 500 ohm potentiometer for position  
 Electrical Connection: 6-pin plastic connector