

Rotational Transducer

- ▼ Up to 50 Turns
- ▼ Industrial Grade
- ▼ Precision Potentiometric Output



RT9101



Specification Summary:

GENERAL

Full Stroke Ranges 0-0.25 to 0-50 turns, see ① next page
 Output Signal voltage divider (potentiometer)
 Accuracy ± 0.30 to $\pm 0.15\%$ full stroke, see ②
 Repeatability $\pm 0.02\%$ full stroke
 Resolution essentially infinite
 Enclosure Material powder-painted aluminum or stainless steel, see ③
 Sensor plastic-hybrid precision potentiometer
 Shaft Loading up to 35 lbs. radial and 5 lbs. axial
 Weight, Aluminum (Stainless Steel) Enclosure 5 lbs. (10 lbs.), max.

ELECTRICAL


Input Resistance 500, 1K, 5K, 10K ohms ($\pm 10\%$) or adjustable bridge, see ④
 Power Rating, Watts 2.0 at 70°F (derated to 0 @ 250°F)
 Recommended Maximum Input Voltage 30 V(AC or DC)
 Output Signal Change Over Measurement Range 94% $\pm 4\%$ of input voltage

ENVIRONMENTAL

Environmental Suitability NEMA 4/4X/6, IP 67/68, see ⑤ and ⑥
 Operating Temperature -40° to 200°F
 Vibration up to 10 G's to 2000 Hz maximum

Celeco's model RT9101 provides a voltage feedback signal for rotational position. The sensing element of this device is a precision plastic-hybrid potentiometer which provided superb linearity and resolution.


This innovative sensor from Celeco, designed to meet tough NEMA-4 and IP67 environmental standards, is available in full-stroke measurement ranges of 1/4 to 50 turns. Because the sensor is potentiometric, the RT9101 is absolute and will maintain position information even after a loss of power.

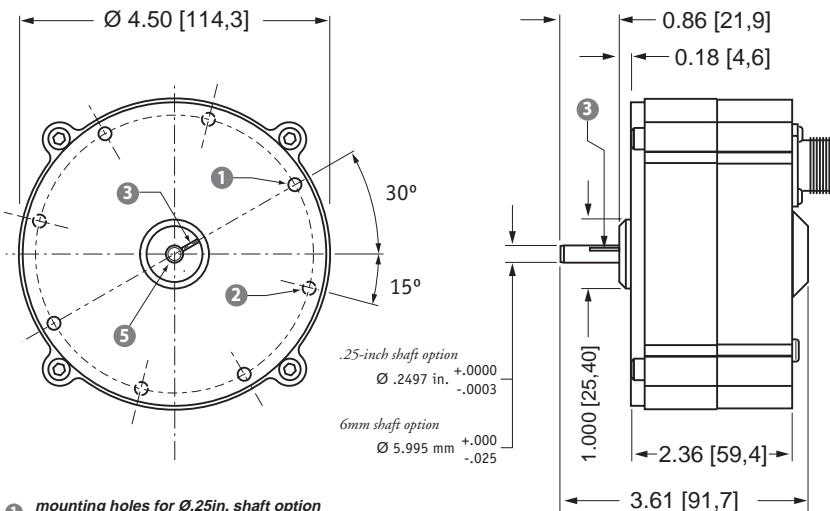

- ① mounting holes for $\varnothing .25$ in. shaft option
#8-32 x 0.180 @ 90° apart on a 4.15 in. dia. BC (4 places)
- ② mounting holes for $\varnothing 6$ mm shaft option
M4 x 4.5mm @ 90° apart on a 105.4mm dia. BC (4 places)
- ③ reference mark
full counter-clockwise position - align mark on shaft to mark on face for start of measurement range

ALL DIMENSIONS ARE IN INCHES [MM]

Electrical Output Signal:

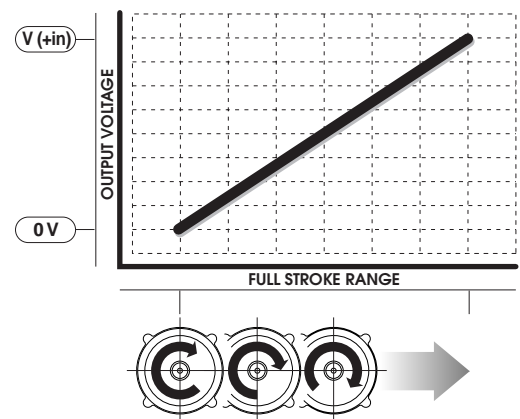

Latin Tech, Inc.

www.lt-automation.com • info@lt-automation.com

RT9101 • Rotational Transducer • Potentiometric Output

▼ Ordering Information

Model Number:

RT9101- _____ **1** - _____ **1** _____ **0**
order code: R A B C D E F G

Full Stroke Range:

R order code:	0R25	0R50	0001	0002	0003
① clockwise shaft rotations, min:	0.25	0.50	1	2	3
② accuracy (% of f.s.):	0.30%	0.30%	0.30%	0.30%	0.30%
potentiometer cycle life*:	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6

R order code:	0005	0010	0020	0030	0050
clockwise shaft rotations, min:	5	10	20	30	50
accuracy (% of f.s.):	0.20%	0.15%	0.15%	0.15%	0.15%
potentiometer cycle life*:	5×10^5	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5

*note: **potentiometer cycle life** is defined as the minimum number of times the sensor can be cycled back and forth, from beginning to end, before any measureable degradation of the output signal occurs.

Enclosure Material:



A order code:	1	2
③ enclosure material:	powder-painted aluminum	303 stainless steel

Mounting Configuration and Shaft Diameter:

B order code:	1	2
shaft diameter:	0.25 inch diameter	6 mm diameter
mounting holes:	8-32 x 0.25 in.	M4 x 6 mm

Output Signals:

D order code:	1	2	3	4	5
④ sensing circuit:	500 Ω	1K Ω	5K Ω	10K Ω	0...30 mV/V adjustable bridge

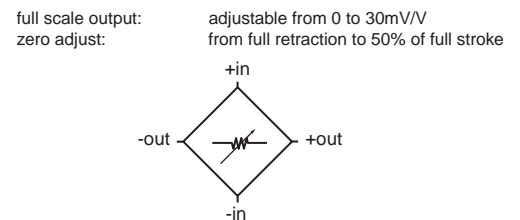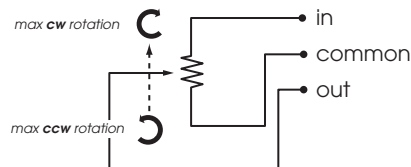

RT9101 • Rotational Transducer • Potentiometric Output

Electrical Connection:

⑤ order code:

	1	2	3	4																																																										
electrical connection:	6-pin plastic connector and mating plug	10 ft. waterproof cable	6-pin metal connector and mating plug	25 ft. instrumentation cable																																																										
	<table border="1"> <thead> <tr> <th>contact view</th> <th colspan="2">connections</th> </tr> </thead> <tbody> <tr> <td></td> <td>standard</td> <td>bridge</td> </tr> <tr> <td></td> <td>A = +IN</td> <td>A = +IN</td> </tr> <tr> <td></td> <td>B = COMMON</td> <td>B = -IN</td> </tr> <tr> <td></td> <td>C = +OUT</td> <td>C = -OUT</td> </tr> <tr> <td></td> <td></td> <td>D = +OUT</td> </tr> </tbody> </table>	contact view	connections			standard	bridge		A = +IN	A = +IN		B = COMMON	B = -IN		C = +OUT	C = -OUT			D = +OUT	<table border="1"> <thead> <tr> <th colspan="2">connections</th> </tr> </thead> <tbody> <tr> <td>standard</td> <td>bridge</td> </tr> <tr> <td>WHT = +IN</td> <td>not available</td> </tr> <tr> <td>BLK = COMMON</td> <td></td> </tr> <tr> <td>GRN = OUT</td> <td></td> </tr> </tbody> </table>	connections		standard	bridge	WHT = +IN	not available	BLK = COMMON		GRN = OUT		<table border="1"> <thead> <tr> <th>contact view</th> <th colspan="2">connections</th> </tr> </thead> <tbody> <tr> <td></td> <td>standard</td> <td>bridge</td> </tr> <tr> <td></td> <td>A = +IN</td> <td>A = +IN</td> </tr> <tr> <td></td> <td>B = COMMON</td> <td>B = -IN</td> </tr> <tr> <td></td> <td>C = +OUT</td> <td>C = -OUT</td> </tr> <tr> <td></td> <td></td> <td>D = +OUT</td> </tr> </tbody> </table>	contact view	connections			standard	bridge		A = +IN	A = +IN		B = COMMON	B = -IN		C = +OUT	C = -OUT			D = +OUT	<table border="1"> <thead> <tr> <th colspan="2">connections</th> </tr> </thead> <tbody> <tr> <td>standard</td> <td>bridge</td> </tr> <tr> <td>RED = +IN</td> <td>RED = +IN</td> </tr> <tr> <td>BLK = COMMON</td> <td>BLK = -IN</td> </tr> <tr> <td>GRN = OUT</td> <td>WHT = -OUT</td> </tr> <tr> <td></td> <td>GRN = +OUT</td> </tr> </tbody> </table>	connections		standard	bridge	RED = +IN	RED = +IN	BLK = COMMON	BLK = -IN	GRN = OUT	WHT = -OUT		GRN = +OUT
contact view	connections																																																													
	standard	bridge																																																												
	A = +IN	A = +IN																																																												
	B = COMMON	B = -IN																																																												
	C = +OUT	C = -OUT																																																												
		D = +OUT																																																												
connections																																																														
standard	bridge																																																													
WHT = +IN	not available																																																													
BLK = COMMON																																																														
GRN = OUT																																																														
contact view	connections																																																													
	standard	bridge																																																												
	A = +IN	A = +IN																																																												
	B = COMMON	B = -IN																																																												
	C = +OUT	C = -OUT																																																												
		D = +OUT																																																												
connections																																																														
standard	bridge																																																													
RED = +IN	RED = +IN																																																													
BLK = COMMON	BLK = -IN																																																													
GRN = OUT	WHT = -OUT																																																													
	GRN = +OUT																																																													
IP rating:	67	67, 68*	65	67																																																										
NEMA rating:	6, 4X**	6, 4X**	4	6																																																										

note: *requires factory submersion test

**applies to stainless steel enclosure, see ③

▼ Sample Model Number

RT9101-0005 - 1 1 1 - 1 1 1 0
order code: R A B C D E F G

Specifications: Full Stroke Range: 5 turns (5 clockwise shaft rotations)
 Enclosure Material: powder-painted aluminum
 Shaft Diameter: 0.25 inches
 Mounting Holes: 10-32 x 0.250 in.
 Output Signal: 500 ohm voltage divider
 Electrical Connection: 6-pin plastic connector